



NOTE: CASING SPACERS
 4-RUNNER MIN. (THRU 24' DIA
 CASING) OR 6-RUNNER MIN.
 (24"-42" DIA. CASING) STAINLESS
 STL. TYPE304; 8" WIDE BAND
 W/ POLYMER RUNNERS; CENTERED
 OR NON-CENTERED; CLEAR BELL,
 RESTRAINED FROM FLOTATION;
 INSULATED; "APS, INC., MOD SS18"
 OR "CASCADE"

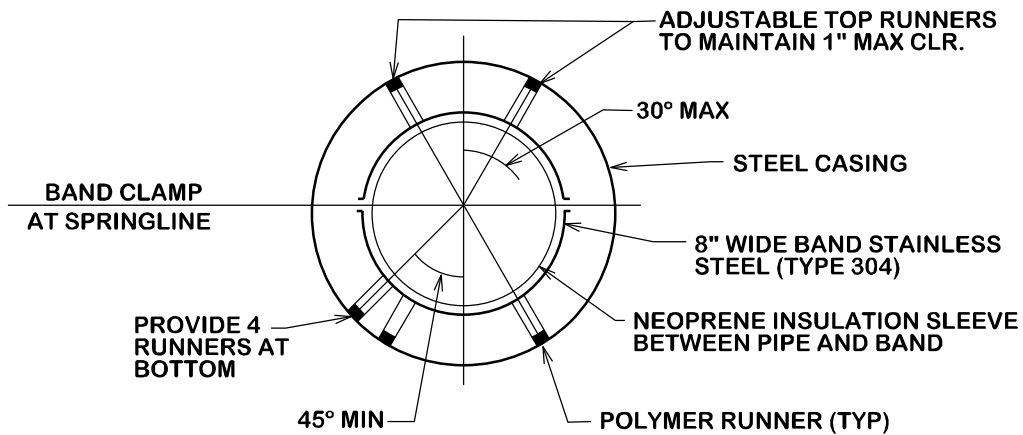

CASING DETAIL

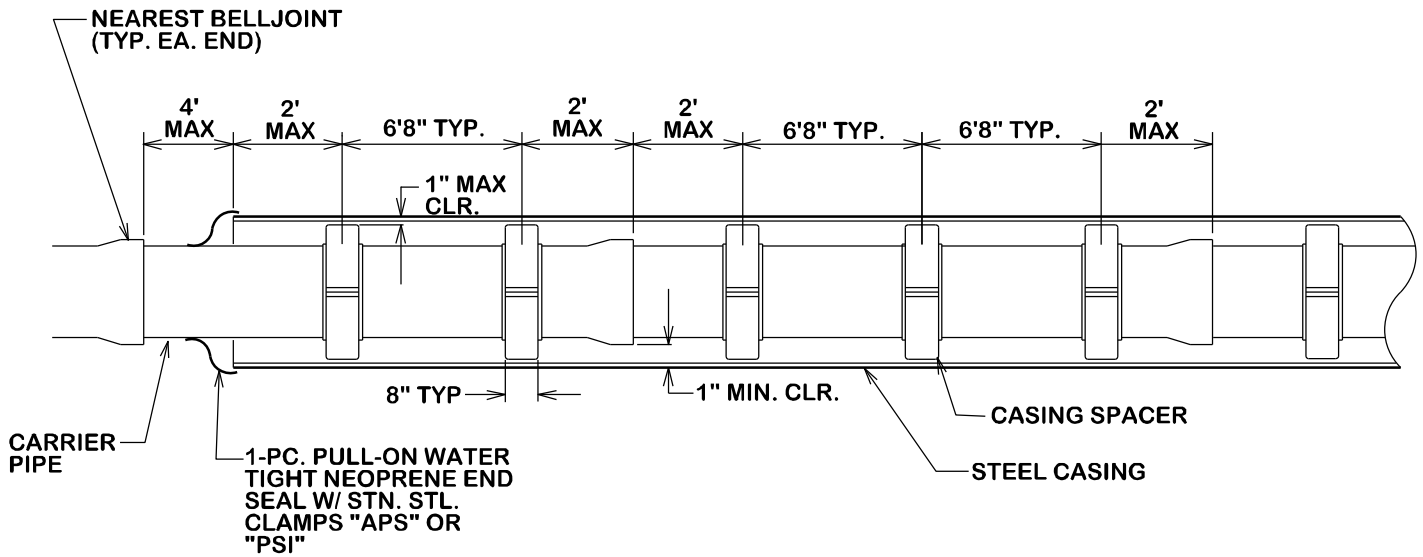

DATE

AUG. 2012

**B/CS UNIFIED
 STANDARD DETAIL**

DETAIL NO.

W2-03

