



MANHOLE BASE SHALL BE PLACED ON FIRM SUBGRADE. ADDITION OF CEMENT STABILIZED SAND OR GRAVEL MAY BE REQUIRED TO STABILIZE FOUNDATION.

IN EXISTING MANHOLE, PLACE PVC ELBOW ON BENCH, GROUT NEW BENCH TO SPRINGLINE AND TROWEL SMOOTH. FORM SMOOTH CHANNEL TO INVERT.

ALL NEW CONNECTION AT EXISTING MANHOLES SHALL BE BY CORING ONLY



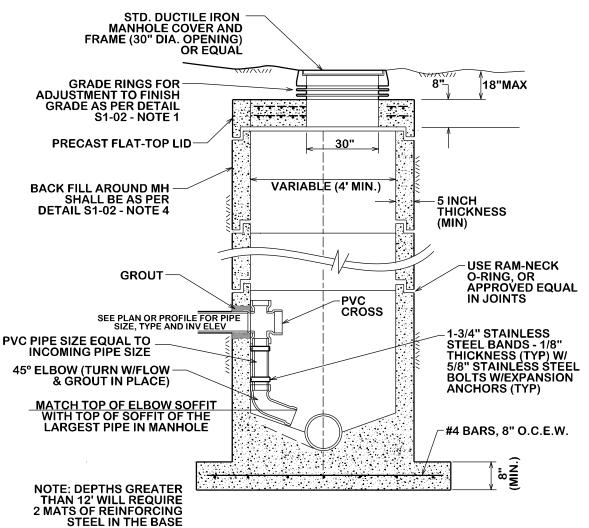

CITY OF BRYAN: DROP MANHOLE TO BE USED ON LINES UP TO 12" IN SIZE CITY OF COLLEGE STATION: DROP MANHOLE TO BE USED ON LINES UP TO 4" IN SIZE



INSIDE DROP MANHOLE

B/CS UNIFIED STANDARD DETAIL

DETAIL NO.

S2-02

