

<u>PLAN</u> (TYPICAL)


STANDARD CONNECTION PROFILE

NOTE:

- 1. WHERE DOUBLE WYE SERVICE ELEVATION IS LESS THAN 2'-7" BELOW PROPOSED BACK OFCURB, MIN. SLAB ELEV. MUST BE SET TO ALLOW SANITARY SEWER SERVICE.
- 2. MARK EACH SERVICE END WITH METAL "T" POST PAINTED GREEN.
- 3. ALL MATERIAL SHALL BE ASTM D3034 SDR26 W/ GASKETS
- 4. ALL SERVICE CONNECTIONS & EXTENSIONS ARE TO BE INSTALLED WITH THE MAIN LINE CONSTRUCTION.
- 5. A CLEAN OUT IS REQUIRED AND WILL BE INSTALLED BY THE PLUMBER AT THE ROW FOR EACH SERVICE.
- WHEN SERVICE CONNECTION IS DEEP, CONTRACTOR MUST PLACE A VERTICAL STACK THAT SHALL BE BROUGHT WITHIN 3-1/2 FEET BELOW NATURAL GROUND.



- BOTTOM LIP OF CONNECTING PIPE SHALL NOT DIP BELOW CENTERLINE OF MAIN.

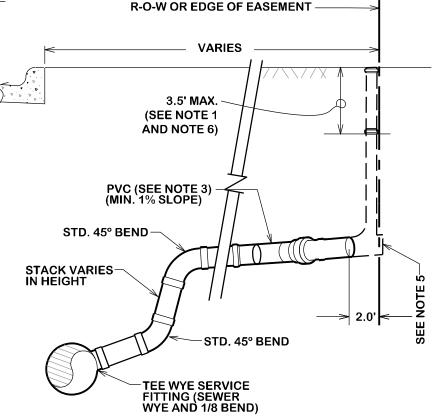

DEEP CONNECTION PROFILE



CITY OF COLLEGE STATION SANITARY SEWER SERVICE CONNECTION

DATE

AUG. 2012

B/CS UNIFIED STANDARD DETAIL

DETAIL NO.

S7-01

