

NOTE:

TEMPORARY DEVICES AROUND STORMS DRAINS ARE USED TO DETAIN AND/OR FILTER SEDIMENT-LADEN RUNOFF. THE PROTECTION ALLOWS SEDIMENT TO SETTLE PRIOR TO DISCHARGE INTO A STORM DRAIN INLET OR CATCH BASIN.






SEDIMENT CONTROL LOGS ARE TO BE USED ON EXISTING CURB INLETS WHICH ARE LOCATED ADJACENT TO OCCUPIED TRAVEL LANES WITHIN THE DISTURBED LIMITS OF A PROJECT AS SHOWN ON THE PLANS.

SEDIMENT CONTROL LOGS ARE TO BE INSTALLED AND MAINTAINED PER THE MANUFACTURER'S INSTRUCTIONS AND PROPERLY WEIGHTED IN ORDER TO REMAIN SECURELY IN PLACE. INSTALLATION MUST MEET THE CONSTRUCTION INSPECTOR'S APPROVAL.

SEDIMENT CONTROL LOGS ARE TO BE CONSTRUCTED OF WOOD FIBERS, SYNTHETIC FIBERS OR OTHER SUITABLE MATERIAL SUFFICIENT TO RETAIN ITS SHAPE AND ENCASED IN A UV STABILIZED FILTERING MEDIA OF SUFFICIENT STRENGTH TO RETAIN SEDIMENT.

SEDIMENT CONTROL LOGS ARE TO BE APPROVED BY THE ENGINEER PRIOR TO INSTALLATION.

SAND BAGS SHALL NOT BE USED.

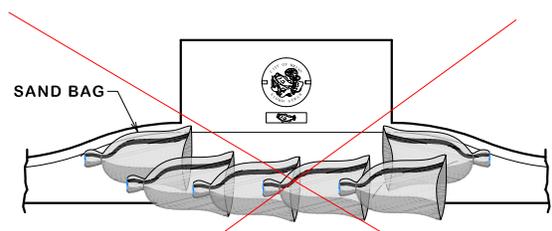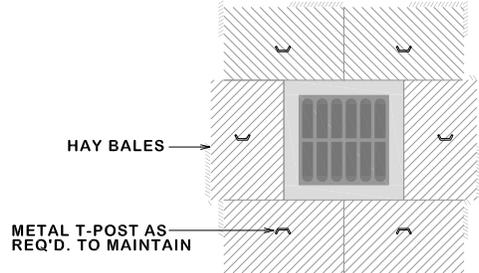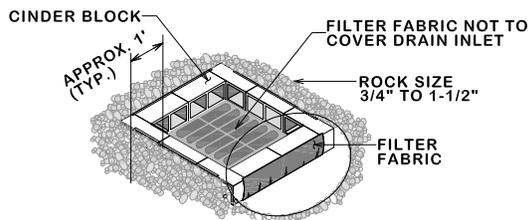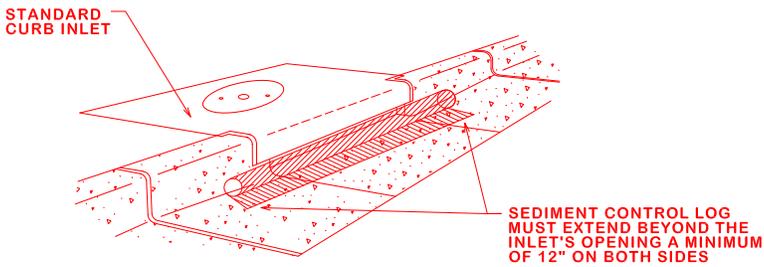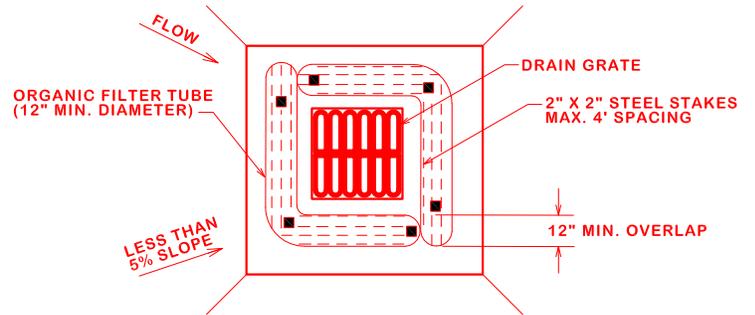

TEMPORARY DEVICES AROUND STORMS DRAINS ARE USED TO DETAIN AND/OR FILTER SEDIMENT-LADEN RUNOFF. THE PROTECTION ALLOWS SEDIMENT TO SETTLE PRIOR TO DISCHARGE INTO A STORM DRAIN INLET OR CATCH BASIN.

SAND BAGS SHALL BE UV RESISTANT AND MUST NOT DEGRADE DUE TO ATMOSPHERIC CONDITIONS.

SAND BAGS SHALL BE REPLACED UPON FIRST SIGN OF DETERIORATION.



<h1>STORM DRAIN INLET PROTECTION</h1>			 CITY OF COLLEGE STATION
DATE DECEMBER 2020	B/CS UNIFIED STANDARD DETAIL	DETAIL NO. SWPP1-00	

