

NOTE:

- 1. ALL MATERIAL SHALL BE ASTN
- 2. ALL SERVICE CONNECTIONS & EXTENSIONS ARE TO BE INSTALLED WITH THE MAIN LINE CONSTRUCTION.
- 3. A CLEAN OUT IS REQUIRED AND WILL BE INSTALLED BY THE CONTRACTOR AT THE ROW FOR EACH LONG AND SHORT SIDE SERVICE. CLEANOUT SHALL INCLUDE A BRASS PLUG. CLEANOUTS SHALL BE EXTENDED 4 FEET ABOVE NATURAL GROUND. CLEANOUT CAP FITTING SHALL BE PLACED ON TOP.
- 4. LOT CORNERS SHALL BE MARKED WITH A LATH UNDER THE SUPERVISION OF A RPLS UPON COMPLETION OF CONSTRUCTION
- 5. "STANDARD" SERVICE CONNECTIONS APPLY WHEN TRENCH IS LESS THAN 7" DEEP.
- 6. "DEEP" SERVICE CONNECTIONS APPLY WHEN TRENCH IS MORE THAN 7' DEEP.
- 7. SERVICE SHALL BE AS SHALLOW AS POSSIBLE AND STILL SERVICE LOT
- 8. WHERE A SINGLE SERVICE THAT SERVES A SINGLE RESIDENCE TAPS INTO A MANHOLE NEAR THE PROPERTY LINE OF THAT LOT A SEWER STACK SHALL NOT BE REQUIRED.
- 9. WHERE A CLEANOUT WILL BE IN A TRAFFIC AREA, A CAST IRON TOP HAT WILL BE REQUIRED.



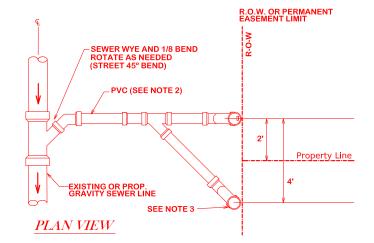

NEW CONSTRUCTION ONLY

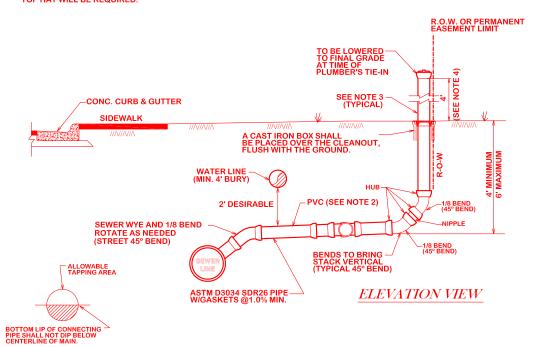

CITY OF BRYAN

STANDARD SEWER SERVICE CONNECTION

DATE

DECEMBER 2020

B/CS UNIFIED STANDARD DETAIL

DETAIL NO.

S6-00

