


## NOTE:

- 1. ALL MATERIAL SHALL BE ASTM D3034 SDR26 W/ GASKETS
- 2. SERVICE SHALL BE AS SHALLOW AS POSSIBLE AND STILL SERVICE LOT
- 3. WHERE A SINGLE SERVICE THAT SERVES A SINGLE RESIDENCE TAPS INTO A MANHOLE NEAR THE PROPERTY LINE OF THAT LOT A SEWER STACK SHALL NOT BE REQUIRED.
- 4. WHERE A CLEANOUT WILL BE IN A TRAFFIC AREA, A CAST IRON TOP HAT WILL BE REQUIRED.
- 4. A CLEANOUT MUST BE INSTALLED ON EACH SERVICE RE-CONNECTION AT THE ROW LINE.

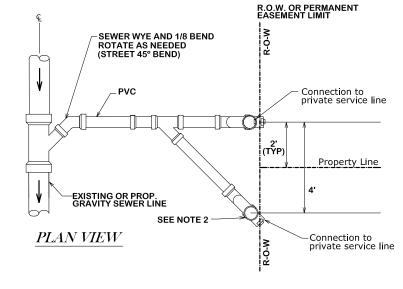



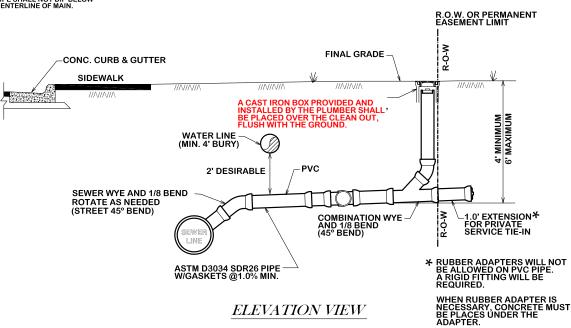

## PLUMBER CONNECTION OR CIP RECONSTRUCTION



## STANDARD SEWER SERVICE RE-CONNECTION

DETAIL NO.

**S6-01** 



DATE