
NOTE:

- 1. ALL MATERIAL SHALL BE ASTM D3034 SDR26 W/ GASKETS
- 2. ALL SERVICE CONNECTIONS & EXTENSIONS ARE TO BE INSTALLED WITH THE MAIN LINE CONSTRUCTION.
- 3. A CLEAN OUT IS REQUIRED AND WILL BE INSTALLED BY THE CONTRACTOR AT THE ROW FOR EACH LONG AND SHORT SIDE SEASS PLUG.
- 4. CLEANOUTS SHALL BE EXTENDED 4
 FEET ABOVE NATURAL GROUND. CLEANOUT
 CAP FITTING SHALL BE PLACED ON TOP.
- 5. NEW CONSTRUCTION (TEMPORARY) USE GLUE CAP IN PLACE OF FEMALE ADAPTER AND BRASS PLUG.



NEW CONSTRUCTION ONLY

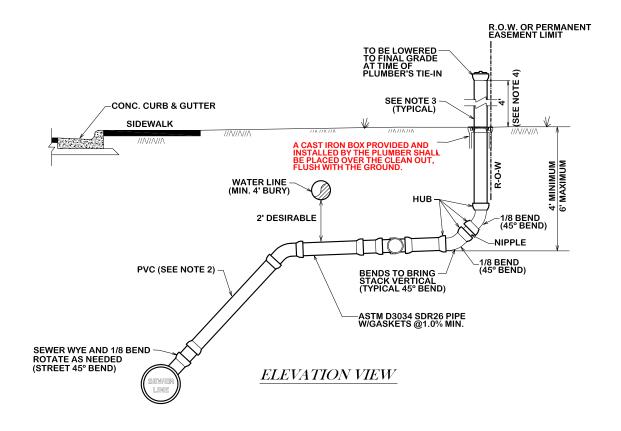

SEWER DEEP SERVICE CONNECTION

DETAIL NO.

S8-00



DATE